




Traffic Management

## COM HUB | EDGE DEVICE

Synchronization and fusion  
of up to 6 sensors

Data collection & storage

Ethernet and PLC  
communication

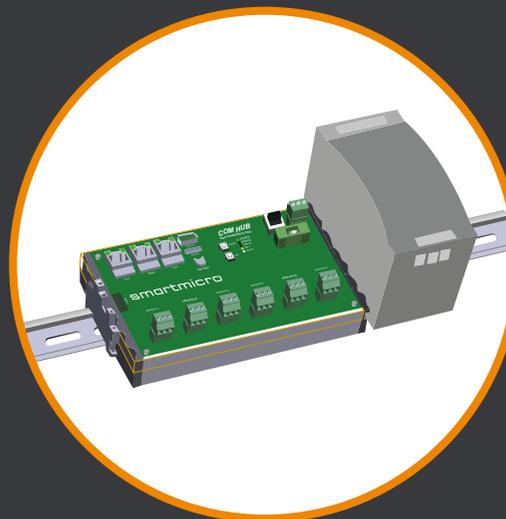

Expandable platform, i.e. for  
V2X applications

Big data for central software  
solutions

Remotely accessible

COM HUB Sync PLC	
<b>FEATURES</b>	
	Built-in surge- and power protection
	Three Ethernet interfaces for external modules, i.e. SDLC, V2X Module
	WIFI communication
	Up to 6 sensors
	SD card and USB 3.0
	Passthrough of MPEG video stream
	Real-time clock
	Pluggable terminal blocks for power and data interfaces
	Status and activity LEDs for all interfaces
	Time and acquisition synchronisation
	Seamless tracking / Fusion tracking
	Hybrid video and radar detection / Fusion tracking
<b>MECHANICAL</b>	
Weight	2305 g / 81.3 oz
Dimensions	500 x 125 x 126 mm / 19.7 x 4.9 x 5 in
<b>GENERAL</b>	
Operating Temperature	-40...+71°C / -40°..+160°F
Operating Voltage / Power Supply	48 V
Interfaces	HD PLC
<b>AVAILABLE ACCESSORIES</b>	
	SDLC Module
	PLC J-Box

